

# Home Automation System Based on Android App

**B. Mashanna<sup>1</sup>, P. Jahnvi<sup>2</sup>, D. Dastha Giri<sup>3</sup>, M. Ajay Kumar<sup>4</sup>,  
N. Jaya Krishna<sup>5</sup>, V. Vishidhar Reddy<sup>6</sup>**

Department Of ECE, Tadipatri Engineering College, Tadipatri

## Abstract

A quickly developing technology that enables remote control of electrical equipment is home automation. This project showcases an Arduino Uno-powered home automation system that is managed by an Android app via a Bluetooth module. A 5V relay module for appliance switching, a buzzer for alerts, a DC fan, a motor, and a lighting system (bulb + holder) make up the system. The system is powered by a 12V adaptor, which guarantees a dependable energy source. By enabling customers to remotely operate household gadgets, the main objective is to improve convenience, energy efficiency, and security.

**Keywords:** internet of things, webserver, Home automation, control systems

## INTRODUCTION

A clever solution that enables users to remotely manage and monitor a variety of home appliances using their cellphones is a home automation system built on an Android app. Through the integration of Internet of Things (IoT) technology, this system allows users to control various electronic equipment, including fans, air conditioners, lights, security systems, and more, through an easy-to-use Android application. Usually, the system consists of hardware elements like microcontrollers (like Arduino or Nodemcu) that are attached to the appliances and use a Wi-Fi network to connect to the Android app. Using their mobile phones, consumers can control their home appliances from any location at any time thanks to the app, which acts as the user interface. This system is a useful addition to contemporary smart homes since it improves user comfort, convenience, security, and energy efficiency.

In the beyond many years, the development of technology has changed the lifestyle of human beings around the world. In this revolution, records era performs a prime role. With the appearance of smartphones, internet usage multiplied rapidly. This leads to the development of statistics technology, and makes the dream of domestic automation a fact. In this unexpectedly changing international, human beings have become more and more linked to smart technology. People need the whole thing to be automatic and smooth to use. Therefore, homes on this century have become increasingly automatic for their simplicity. Although humans are lucky enough to have new smart devices, maximum domestic automation structures are a chunk pricey. But now not all and sundry is wealthy enough. As a end result, the need to locate home technology at low fee for normal users is increasing. Most of those home automation structures are for those who love luxury. This mag proposes a low-value device that reduces the attempt required by way of the person to manually manage the gadgets.

Wireless networked domestic automation systems have grow to be increasingly more popular, offering comfort, safety and security to all types of users. The purpose of this challenge is to create a wi-fi domestic automation gadget with multilingual manage instructions. This machine makes use of ESP32 and Google Assistant to talk with the user. Users manipulate home equipment like lighting, lovers and liberate clever doorways using voice instructions in English or Malayalam. The aged and the disabled find it difficult to

adapt to this changing era, which helps the devices operate the usage of neighborhood languages. Integrating Google Assistant generation into the home automation machine makes the gadget handy and easy to use. We all remember the fact that agriculture in India is a first-rate a part of the monetary system and a big part of the rural population contributes to India's increase.

When generation and agriculture come collectively, it will convey awesome effects. Today, all of us admit that the traditional technique can't meet the wishes of the human beings, especially the problem of the usage of chemical substances to satisfy human beings's preferences and green pastures. There are some troubles with the conventional farming technique, as an example, converting weather impacts the vegetation and the plants can be affected by illnesses. Therefore, for higher yields, agricultural equipment has to grow to be greater contemporary, and the dependence on exertions has to be shifted toward sustainable agriculture, which many nations use. We all understand that technology is growing day by day, and this era lets in us to use present day agricultural techniques.

When controlling the greenhouse, the gadget will set certain values, which can be adjusted over time. This system may be carried out with the possibility of managing the scientific method, maximizing the yield and shielding you from failures in herbal farming. It is a crop safety monitoring and management device that integrates the low-strength and unstable Arduino into lengthy-distance wireless verbal exchange. Arduino is a development tool that could connect and paintings with a Wi-Fi community. With a global network device thru the World Wide Web. The concept is to govern the climatic situations consistent with the unique crop. These sensors gather statistics approximately greenhouse parameters, along with air strain, air temperature, mild depth, soil moisture, air humidity, and water vapor inside sprinklers and drip irrigation devices, and can be considered a part of a purchaser tool gadget.

## OBJECTIVES

The primary goals of the suggested home automation system are to: Offer an affordable and easy-to-use way to automate household equipment. To use Android apps to provide remote control of household equipment. To incorporate Bluetooth and other connectivity technologies for smooth device operation. To increase energy efficiency by automating device operations according to environmental conditions and user preferences. To improve home security by making it possible to remotely monitor and manage security equipment like alarms and cameras.

## LITERATURE SURVEY

In the technology of digitalization and automation, people's lives turn out to be less complicated as nearly the whole thing is computerized in place of old manual structures. Today, human beings have made it such part of their each day lives that they experience helpless without it. The Internet of Things (IoT) provides a platform that allows devices to be related, study, and remotely managed thru community infrastructure. In this newsletter, we will consciousness on domestic automation the usage of smartphones and tablets. IoT devices display and manage electronic, electrical, and mechanical systems used in numerous forms of homes. Devices linked to a cloud server are managed by way of an administrator, which simplifies the paintings of multiple users connected to sensors and manage nodes [1].

The production and transformation of conventional homes into clever houses has improved significantly within the beyond few years. This may be attributed to technology consisting of the Internet, sensors, smartphones, clever devices, cloud computing, and digital assistants which include Amazon Alexa, Google Home, Google Assistant, Apple Siri, and Microsoft Cortana. Smart houses were constructed to enhance the best of lifestyles of ordinary humans without disabilities. Interestingly, we've seen clever domestic citizens benefit from safety, energy savings, and the capacity to manipulate lights, HVAC, door locks, and

appliances from the consolation of their own domestic, such as whilst sitting on the couch or in mattress [2].

Homelessness is a primary problem confronted through people with disabilities. The development of domestic automation has turn out to be extensive within the beyond few years, and the idea right here is to create a machine that provides ease and luxury to humans with disabilities in their everyday lives. This device works remotely the usage of voice control, Wi-Fi, and Bluetooth, which makes human beings impartial and lets in them to without difficulty get entry to their gadgets. The advent of low-cost and less expensive microcontrollers has made it possible to create inexpensive client electronics gadgets for the home [3].

The improvement of Internet of Things era has had a fantastic effect on human existence. Home automation is an utility of IoT era that allows human activities. The issue of bodily incapacity is the query of constrained functionality for human beings with disabilities. This article proposes a design for an IoT-primarily based smart domestic application with far flung manipulate of gadgets designed for human beings with disabilities the use of voice commands. With a smart home control system, people with disabilities can manipulate domestic home equipment such as televisions (TVs), lights, and fans the usage of only voice commands, while not having to move to turn the electrical appliances on or off. Voice recognition in electric appliances uses the Google Assistant app on smartphones. If the pronunciation is accurate, the Google Assistant app will be given the voice command [4].

This article introduces an IoT-primarily based domestic automation machine the usage of NodeMCU and BlynkIoT utility. It lets in customers to manipulate their domestic home equipment remotely the usage of their smartphones. The device uses no modules to manipulate devices and integrates with Google Home for voice control. With minimum additives and smooth setup, it affords an lower priced and scalable answer for transforming conventional homes into clever, automated environments [5]. This article discusses security demanding situations in IoT-based totally clever homes, including the threat of bodily and cyber assaults. It highlights troubles such as weak password security, lack of encryption, and low person consciousness. It additionally affords answers to ensure safety in smart houses and defend person statistics [6].

This paper discusses the mixing of IoT gadgets with smart homes to improve energy efficiency. It explores how gadgets such as clever thermostats and clever lighting fixtures structures can reduce power consumption through inspecting user behavior. The paper also discusses privateness and interoperability problems, proposes solutions for seamless IoT integration and improved sustainability [7]. This paper presents an IoT-based clever home automation incorporated power management device. It addresses the problem of extra strength intake caused by clever gadgets and explores how electricity consumption may be efficaciously controlled in a smart home surroundings. The device is designed and simulated to estimate the strength intake for every cell for powerful electricity control [8].

This paper describes the improvement and implementation of an IoT-based incorporated home automation machine. It uses an AVR microcontroller, ESP 8266 Wi-Fi module, Bluetooth module, and various environmental sensors (light, temperature, humidity, motion, soil moisture) to automate home appliances. The cloud-based device makes use of an app for actual-time tracking, voice control via Google Assistant, and far off tracking. It goals to improve electricity efficiency and comfort by means of automating the manager of electrical masses primarily based on environmental situations and person alternatives [9].

A key advantage of the usage of captured application meters for software-owned agencies is the potential

to send energy usage facts to faraway software statistics facilities for diverse makes use of, such as billing. There also are many useful client uses for accumulating and similarly analyzing energy usage statistics from clever meters. One use is home automation. The trendy connected automation answers, including safety and home care, rely upon different mounted devices consisting of sensors and/or video cameras, which have high installation and annual renovation prices. Since the power intake patterns from smart meter statistics mirror the each day lives of citizens, a new strength composition-primarily based home automation method may be developed for clever domestic automation [10].

### **EXISTING SYSTEM:**

The layout and implementation of a domestic equipment management device based totally on an Android phone is critical and is being carried out, which presents far flung manipulate of home equipment primarily based on an Android smartphone. The person enters the clever interface and thoroughly presses the buttons to ship commands that are dispatched to the home information center through the GSM community. Then the PIC processor acknowledges the particular control and wirelessly controls the house via RF signals, subsequently reaching far flung manipulate of the gadgets. Using Bluetooth on Android mobile gadgets for home protection programs brings integrated mobile device facts into our day by day lives. Home automation and safety have become an increasing number of essential functions on cell devices, with mobile structures and security systems communicating thru Bluetooth, as the gadget most effective calls for a small conversation variety. With the assist of an Android mobile device, you may control faraway features inclusive of locking doors and turning lighting on/off.

### **Disadvantages:**

- Reliance on a Network Connection Restricted
- Bluetooth Range Battery Reliance.

### **PROPOSED SYSTEM**


An Arduino Uno microcontroller serves as the central processing unit for the suggested home automation system. A Bluetooth module is included inside the system to connect to an Android app. A motor, DC fan, and lightbulb are just a few of the gadgets that users may manage by sending commands through the app. To turn the gadgets on or off, the relay module functions as a switch. To offer aural alerts for status changes, a buzzer is incorporated. A 12V adapter powers the system, guaranteeing uninterrupted functioning.

### **Advantages:**

- Energy Efficiency
- Cost-Effective
- Reduced Complexity
- Scalability.

### **BLOCK DIAGRAM**

The description of the software's general features is closely related to the device's order and requirements. The architectural design process includes the description and design of numerous web pages and their interactions. Key software components are recognized, deconstructed into conceptual processing modules and records systems, and their relationships are described. The proposed system defines the following modules.

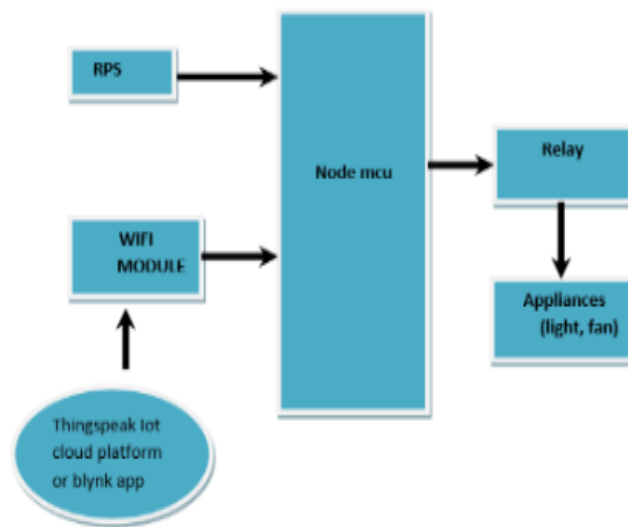

## HARDWARE EXPLANTION

### Node MCU esp8266:



There are open source prototyping board designs available for the NodeMCU firmware. "NodeMCU" is a combination of the terms "node" and "MCU" (micro-controller unit). The firmware, not the related development kits, is technically referred to as the "NodeMCU" in this context. Built around the ESP8266 Wi-Fi System-on-a-Chip (SoC), NodeMCU is an open-source, low-cost IoT platform and development environment that is mostly used for Internet of Things (IoT) project prototype and development. Designed as a standalone system-in-a-chip, this Wi-Fi module includes a TCP/IP protocol stack, 4MB of reminiscence, and a multitude of additional hardware (regulators, amplifiers, and so forth.). This will allow any microcontroller, consisting of an Arduino board, to access your Wi-Fi community connected in the project. Its small size in no way compromises its development abilities thanks to the GPIO ports. Caution: You want to installation a common sense degree converter to use with a 5V microcontroller.



## 12v ADAPTER



On the other hand, 12V adapters provide a higher voltage of 12V, which makes them appropriate for gadgets that need more electricity. These consist of different motors, computers, routers, external hard drives, and security cameras. There are various dangers associated with using a 12V charger on a 5V battery. Overcharging the increased voltage may result in overcharging, which could harm the internal parts of the battery and cause overheating. A typical electrical component used to supply a steady 12 volt direct current (DC) voltage to a variety of devices and applications is a 12V power supply. These power sources, which provide adaptability and dependability for a variety of applications, are crucial in both consumer electronics and industrial environments.

## RELAY



There need to be no electrically operated switch. Current flowing via the relay coil creates a magnetic discipline that attracts the bar and changes the transfer contact. The coil present day can be turned on or off, so the slider position has two positions and is a double function (toggle) transfer. Allow one circuit to bypass

via the second, which may be completely separate from the primary. For instance, an excessive-voltage battery circuit can use an AC 230 V circuit: internal there is no electrical connection among the two circuits; the relationship is magnetic and mechanical. The coil present day incorporates a high inner present day, normally 30mA for 12V devices, but can be as high as 100mA for devices designed to function at lower voltages. Most ICs (eu) can't provide this present day, and the transistor to a larger fee is used to increase the small IC cutting-edge for the larger coil required. The popular 555 chip has a most modern of 2 hundred mA, so those gadgets can directly power any circuits without amplification.

## LIGHT SENSOR



This light sensor module is predicated on a GL5528 photodetector to discover the mild intensity in the environment. Because the resistance of the sensor modifications with the amount of light it's far uncovered to, the output voltage adjustments with the depth of the light. Its module outputs each analog and digital alerts that can be used to trigger different modules. In addition, the potentiometer can regulate the sensitivity of the digital output. The digital output terminal is HIGH when the light intensity exceeds the price from the potentiometer and vice versa. Analog terminal outputs will boom with light intensity.

## FUTURE SCOPE

In the destiny, in addition to the monitoring parameters of the plant, we also can upload any other function along with tracking the health of the plant via image processing, which we are able to monitor through any a part of the plant that is both wholesome or not. A part of the plant has lifeless cells.

We also can decide the amount of chemical compounds wanted for plant growth the usage of numerous technology.

## CONCLUSION

A smart greenhouse monitoring device has been correctly implemented the usage of the idea of Internet of Things, that can prove to be a carrier for the agricultural region. A big greenhouse system is traditionally exertions-intensive and time-eating. The proposed machine saves time, cash and human effort. It provides a managed environment for the flora and as a result will increase the general yield. The Smart Greenhouse mechanically optimizes diverse parameters for plant boom. It sends real-time parameter facts to a customizable web page for non-stop and effective tracking. The application may be utilized in greenhouses, botanical gardens and agricultural farms. With minor changes, this design can be utilized in mechanical businesses and factories to govern various parameters of machines walking, including temperature, etc.

## REFERENCES

- [1] A. M. Pirbazari, M. Farmanbar, A. Chakravorty, and C. Rong, "Shortterm load forecasting using smart meter data: A generalization analysis," *Processes*, vol. 8, no. 4, p. 484, Apr. 2020.
- [2] S. Y. Chen and Z. L. Hu, "A smart grid-based home energy aware system," *Sens. Mater.*, vol. 29, pp. 1513–1522, 2017.
- [3] T. L. Chen, T. C. Kang, C. Y. Chang, T. C. Hsiao, and C. C. Chen, "Smart home power management based on Internet of Things and smart sensor networks," *Sens. Mater.*, vol. 33, pp. 1687–1702, 2021.
- [4] M. Jin, S. Liu, S. Schiavon, and C. Spanos, "Automated mobile sensing: Towards high-granularity agile indoor environmental quality monitoring," *Building Environ.*, vol. 127, pp. 268–276, Jan. 2018.
- [5] B. Dong, D. Yan, Z. Li, Y. Jin, X. Feng, and H. Fontenot, "Modeling occupancy and behavior for better building design and operation—A critical review," *Building Simul.*, vol. 11, no. 5, pp. 899–921, Oct. 2018.
- [6] W. L. Hsu, W. T. Chen, H. H. Kuo, Y. C. Shiau, T. Y. Chern, S. C. Lai, and W. H. Fan, "Establishment of smart living environment control system," *Sens. Mater.*, vol. 32, pp. 183–195, Jan. 2020.
- [7] W. L. Hsu, H. H. Tsai, M. L. Yang, S. C. Lai, M. C. Ho, and Y. C. Shiau, "Development of smart residential environment control system," *Sens. Mater.*, vol. 33, pp. 3361–3377, Jan. 2021.
- [8] Y. Himeur, A. Alsalemi, F. Bensaali, and A. Amira, "Building power consumption datasets: Survey, taxonomy and future directions," *Energy Buildings*, vol. 227, Nov. 2020, Art. no. 110404.
- [9] A. Sayed, Y. Himeur, A. Alsalemi, F. Bensaali, and A. Amira, "Intelligent edge-based recommender system for internet of energy applications," *IEEE Syst. J.*, vol. 16, no. 3, pp. 5001–5010, Sep. 2021.
- [10] B. Völker, A. Reinhardt, A. Faustine, and L. Pereira, "Watt's up at home? Smart meter data analytics from a consumer-centric perspective," *Energies*, vol. 14, no. 3, p. 719, Jan. 2021.
- [11] A. Tundis, A. Faizan, and M. Mühlhäuser, "A feature-based model for the identification of electrical devices in smart environments," *Sensors*, vol. 19, no. 11, p. 2611, Jun. 2019.
- [12] Y. H. Lin and M. S. Tsai, "An advanced home energy management system facilitated by nonintrusive load monitoring with automated multiobjective power scheduling," *IEEE Trans. Smart Grid*, vol. 6, no. 4, pp. 1839–1851, Jul. 2015.
- [13] Y.-H. Lin and Y.-C. Hu, "Residential consumer-centric demand-side management based on energy disaggregation-piloting constrained swarm intelligence: Towards edge computing," *Sensors*, vol. 18, no. 5, p. 1365, Apr. 2018.
- [14] K. K. Radhakrishnan, H. D. Chinh, M. Gupta, S. K. Panda, and C. J. Spanos, "Context-aware plug-load identification toward enhanced energy efficiency in the built environment," *IEEE Trans. Ind. Appl.*, vol. 56, no. 6, pp. 6781–6791, Nov. 2020.
- [15] D. A. M. Lemes, T. W. Cabral, G. Fraidenraich, L. G. P. Meloni, E. R. De Lima, and F. B. Neto, "Load disaggregation based on time window for HEMS application," *IEEE Access*, vol. 9, pp. 70746–70757, 2021.



- [16] M. Lu and Z. Li, "A hybrid event detection approach for non-intrusive load monitoring," *IEEE Trans. Smart Grid*, vol. 11, no. 1, pp. 528–540, Jan. 2020.
- [17] T.-T.-H. Le, H. Kang, and H. Kim, "Household appliance classification using lower odd-numbered harmonics and the bagging decision tree," *IEEE Access*, vol. 8, pp. 55937–55952, 2020.
- [18] P. R. Z. Taveira, C. H. V. De Moraes, and G. Lambert-Torres, "Nonintrusive identification of loads by random forest and fireworks optimization," *IEEE Access*, vol. 8, pp. 75060–75072, 2020.
- [19] P. Franco, J. M. Martinez, Y.-C. Kim, and M. A. Ahmed, "IoT based approach for load monitoring and activity recognition in smart Homes," *IEEE Access*, vol. 9, pp. 45325–45339, 2021.
- [20] Y. Himeur, A. Alsalemi, F. Bensaali, A. Amira, and A. Al-Kababji, "Recent trends of smart non-intrusive load monitoring in buildings: A review, open challenges and future directions," *Int. J. Intell. Syst., Early Access*, vol. 37, pp. 1–56, Oct. 2022.